

# Venezia

---

*porcelain stoneware*



venezia  
CALACATTA





# CALACATTA

48"x48"

ELEVECG48L

polished finish  
9mm thickness  
10 faces



venezia  
CARRARA





# CARRARA

## 48"x48"


ELEVECR48L




polished finish  
9mm thickness  
12 faces



venezia  
CEPPO GREY

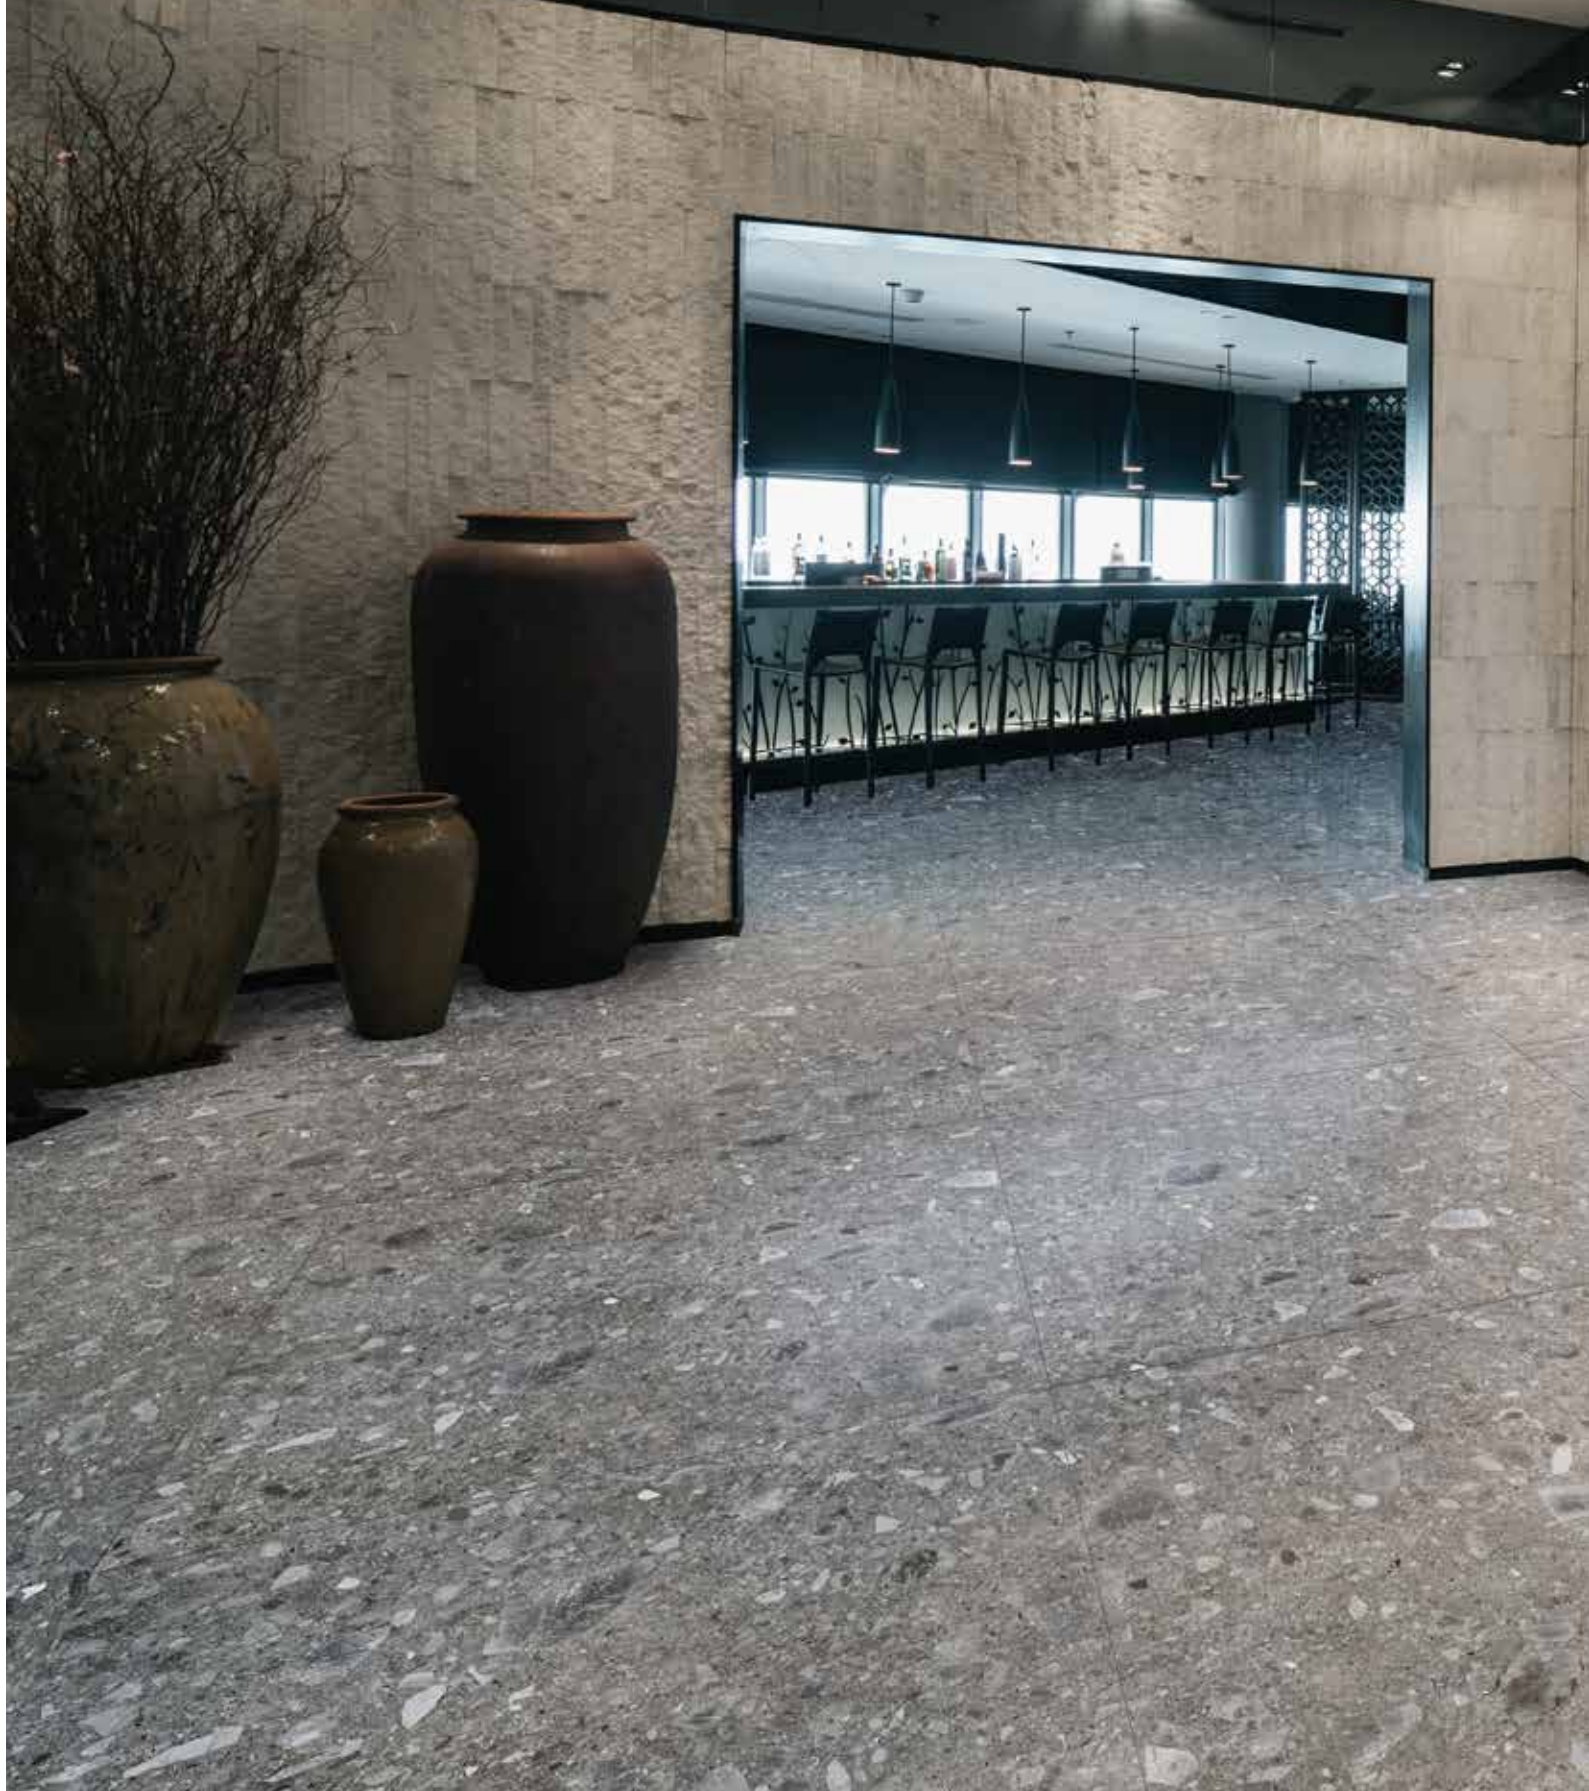

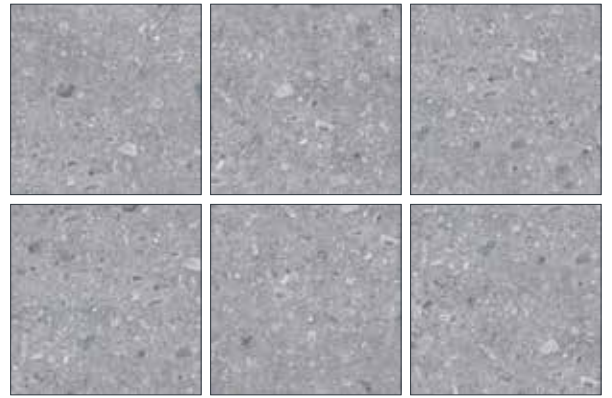


# CEPPO GREY

48"x48"

ELEVECE48

matte finish  
9mm thickness  
6 faces

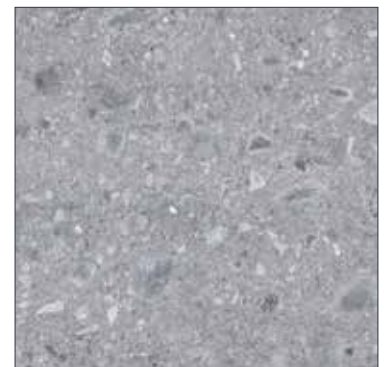

venezia  
DOLOMITE







# DOLOMITE 48"x48"

ELEVEDO48L

polished finish  
9mm thickness  
15 faces



venezia  
LASA






LASA  
48"x48"


ELEVELA48L

polished finish  
9mm thickness  
15 faces



venezia  
NERO MARQUINA

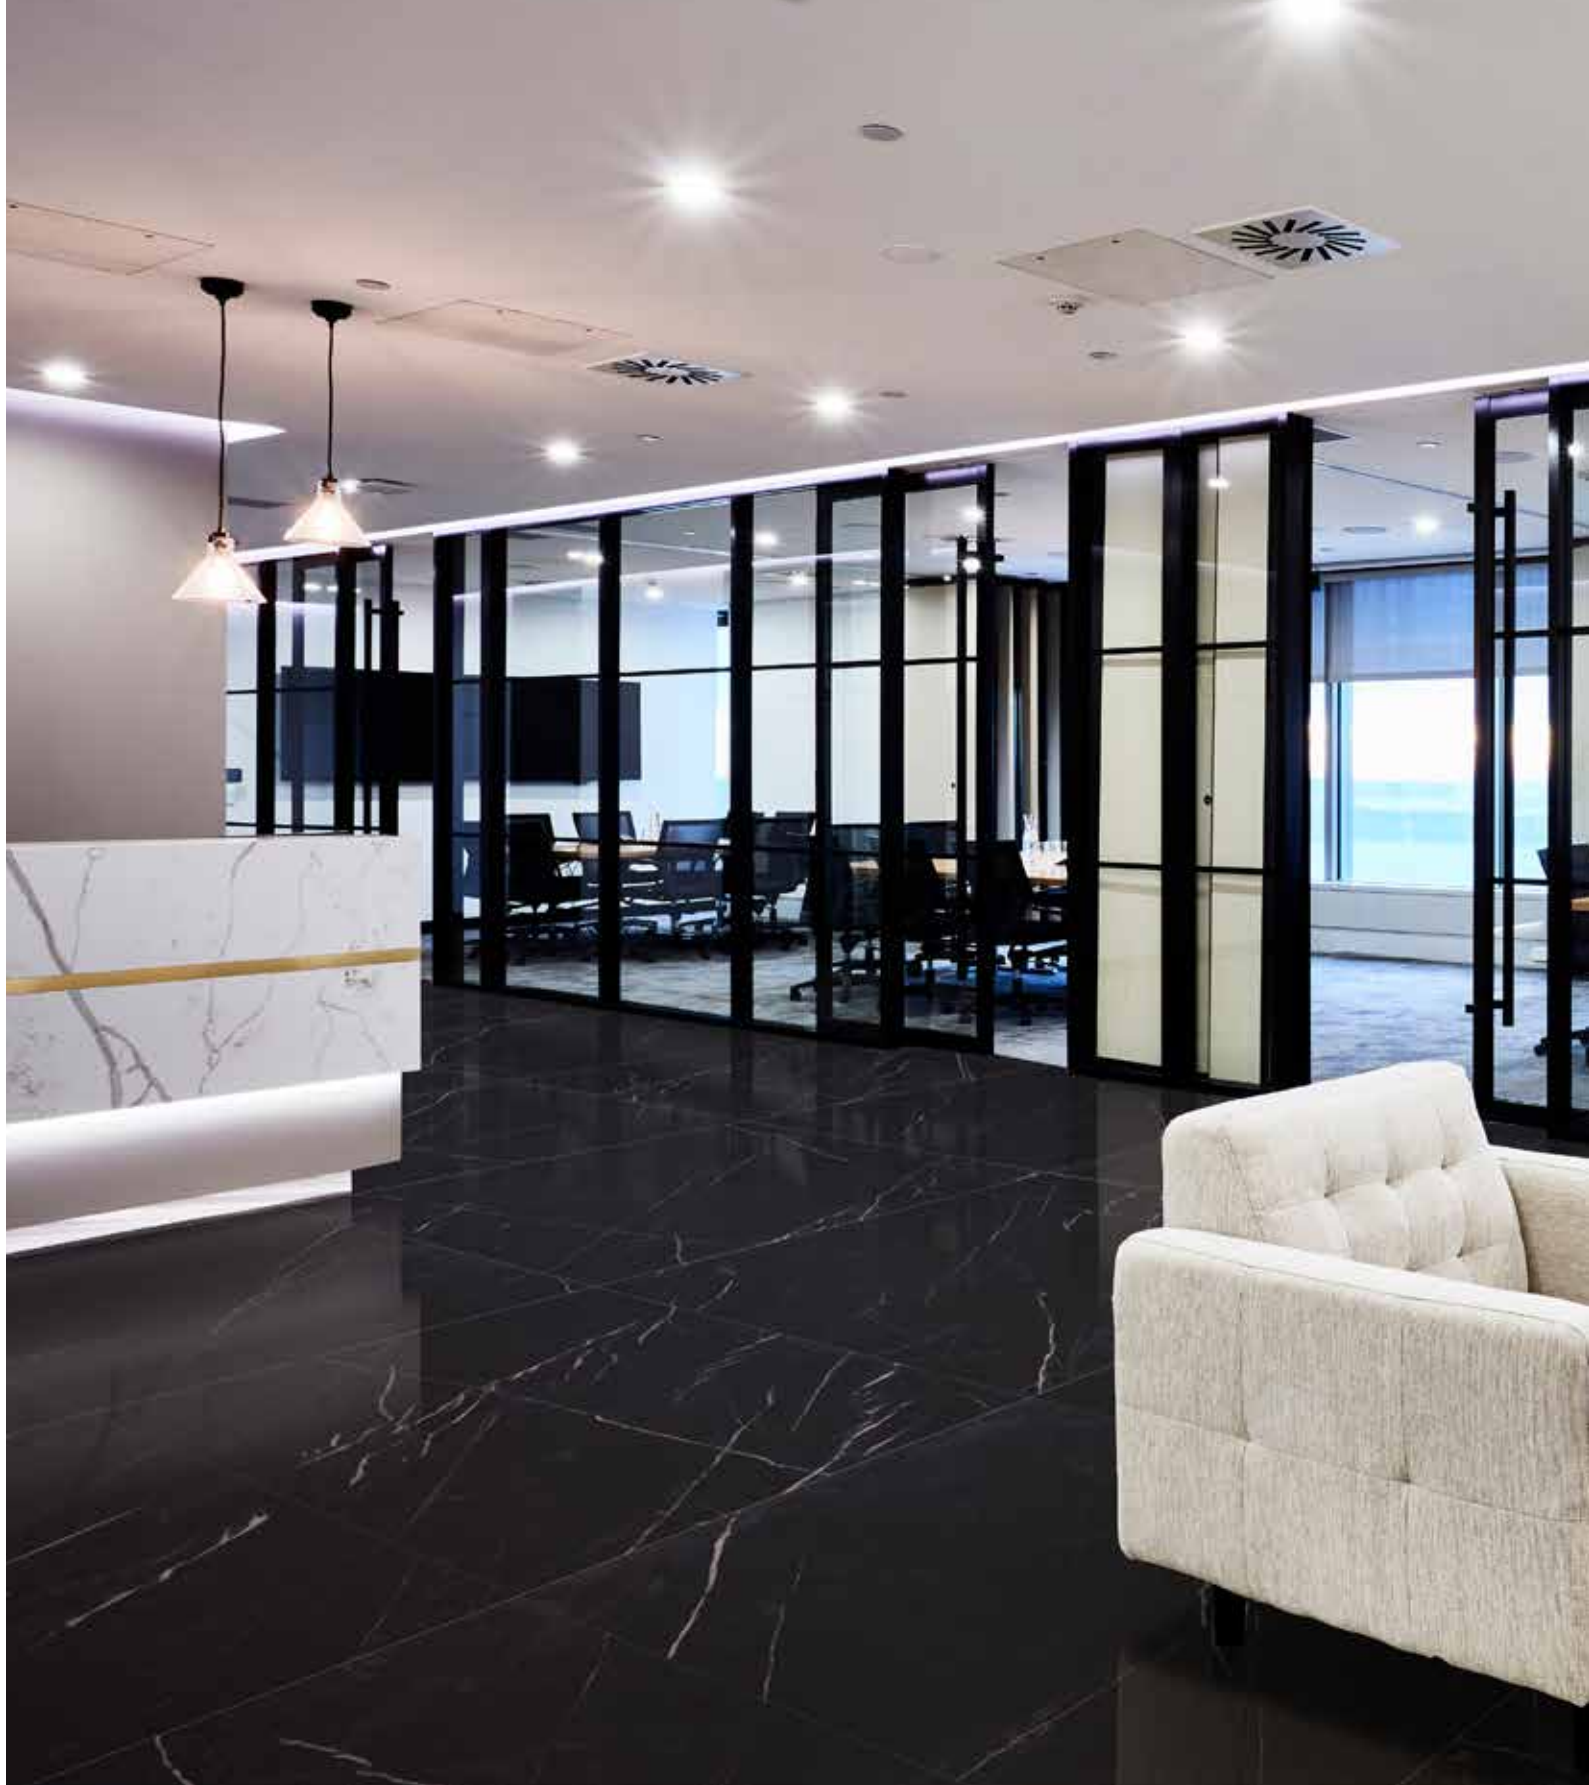

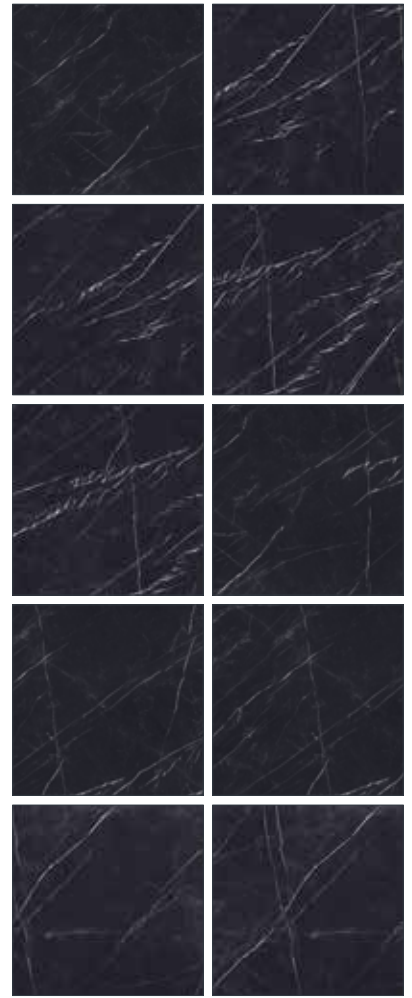


# NERO MARQUINA 48"x48"

ELEVENM48L



polished finish  
9mm thickness  
10 faces

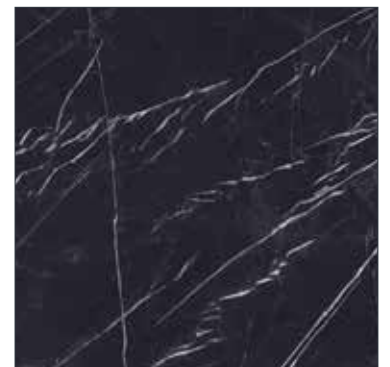

venezia  
SAHARA WHITE






# SAHARA WHITE


## 48"x48"

ELEVESW48L

polished finish  
9mm thickness  
10 faces

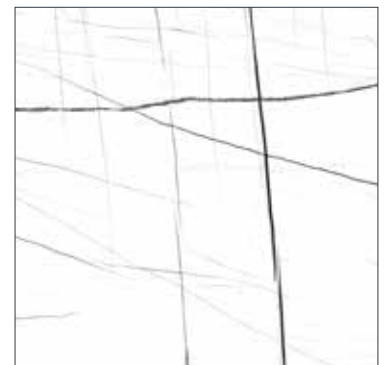

venezia  
STATUARIO

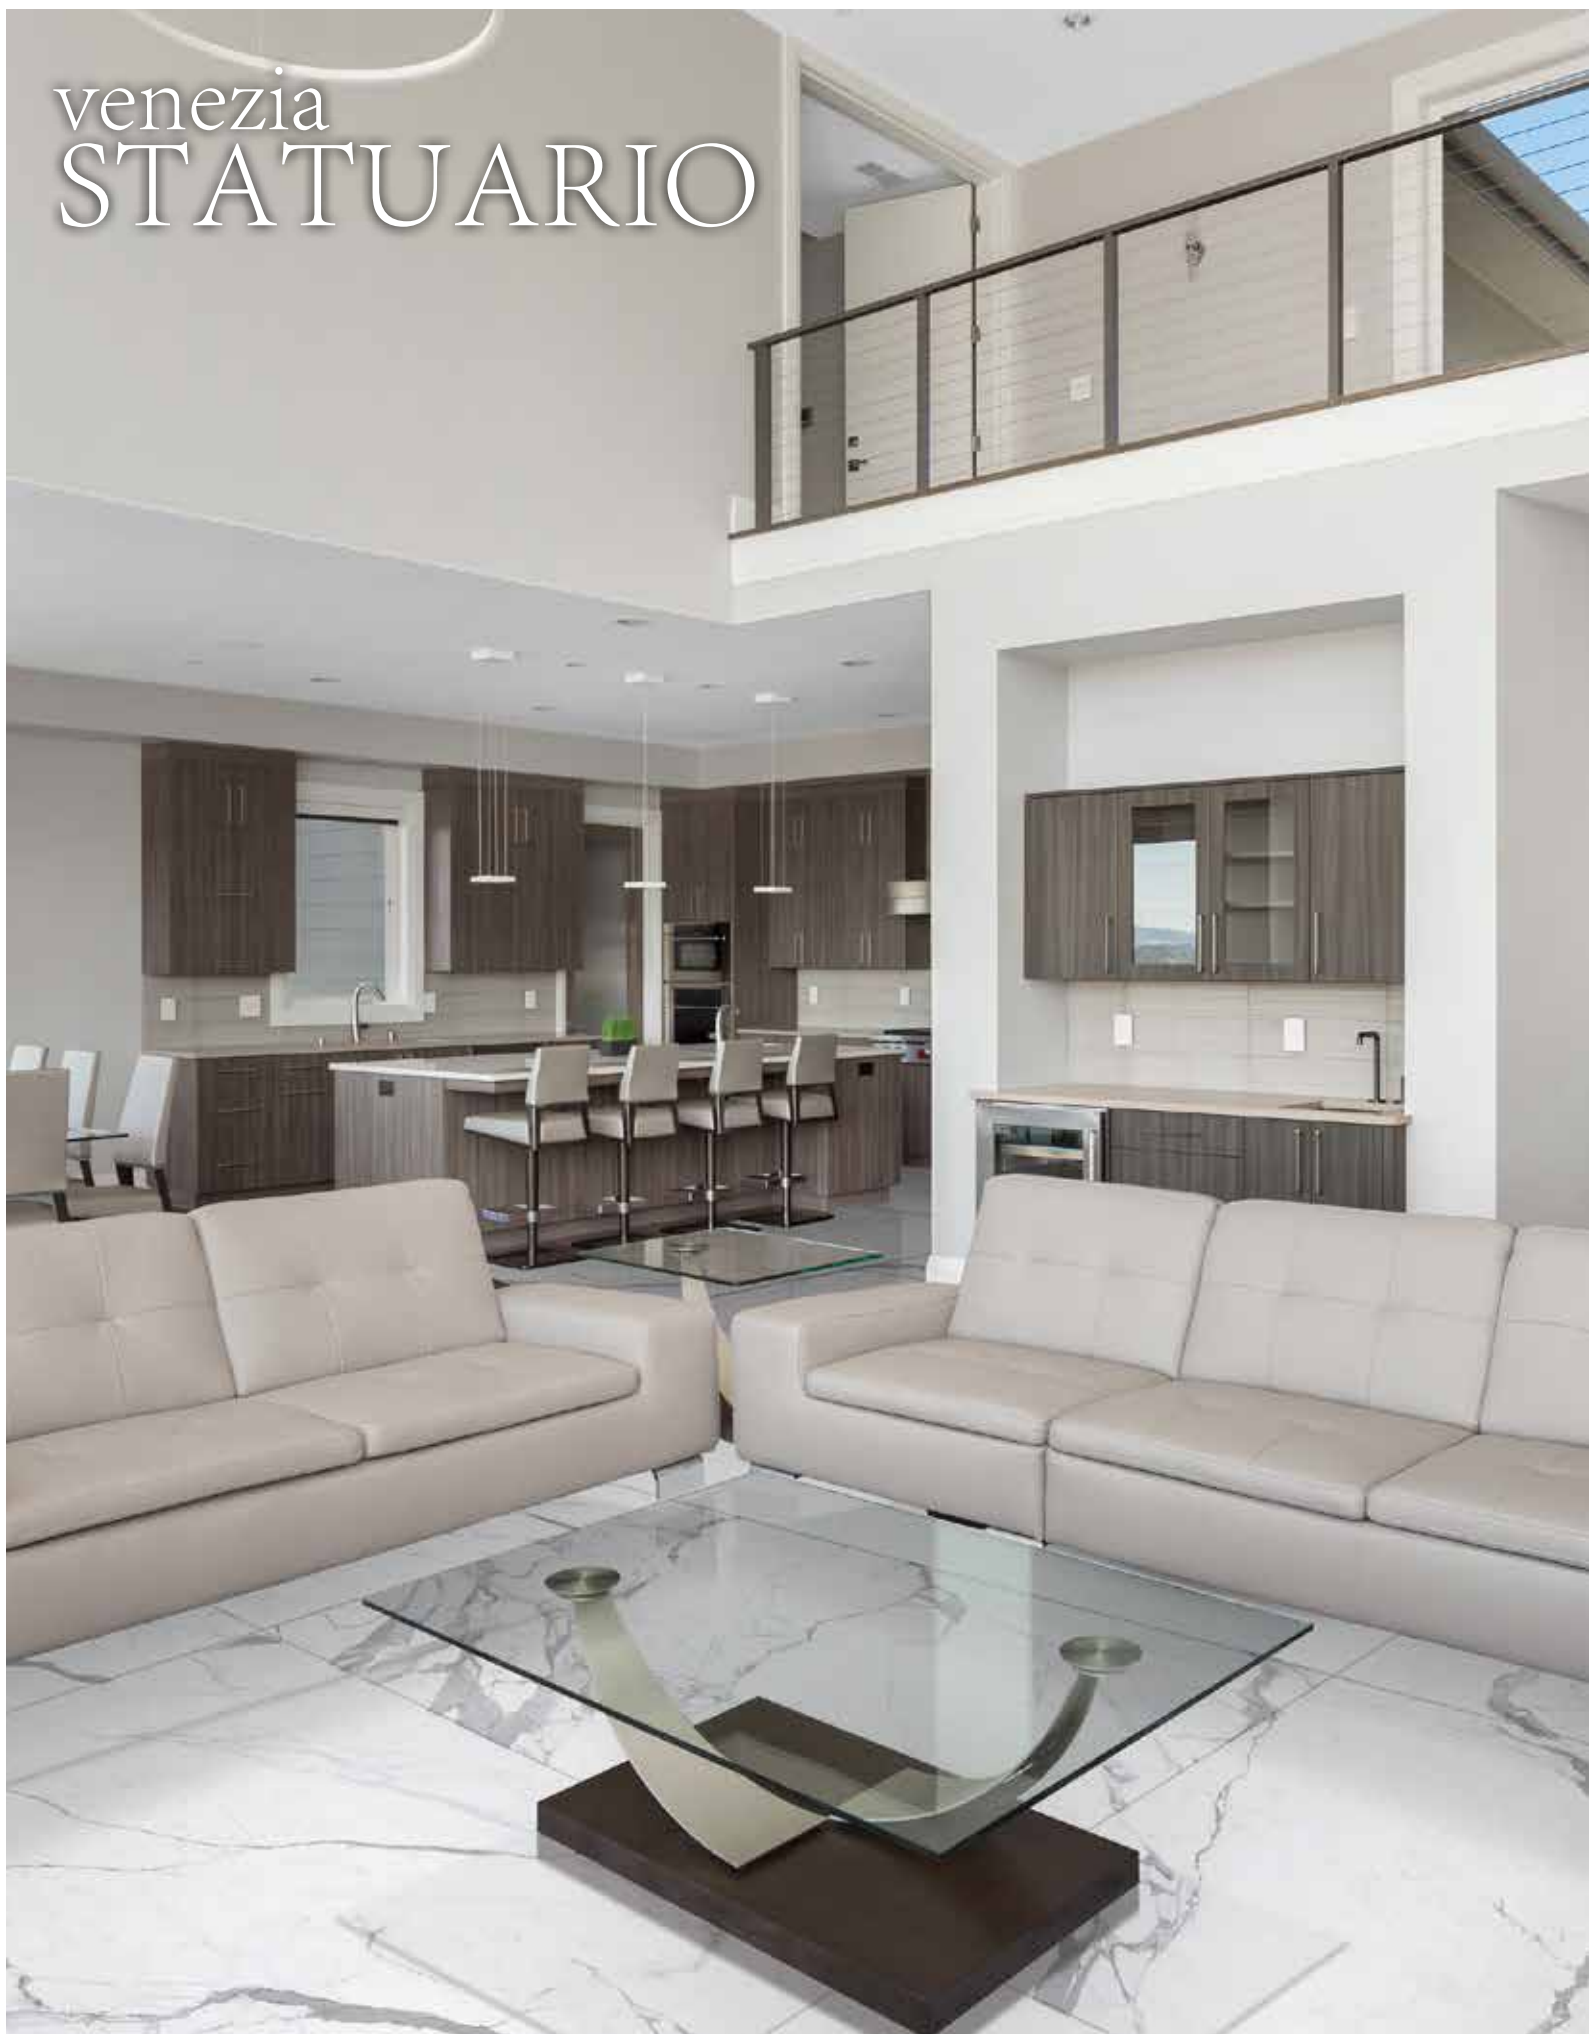





# STATUARIO 48"x48"


ELEVEST48L




polished finish  
9mm thickness  
8 faces




## Suggested Applications



## Installation Suggestions



## Porcelain Type



## Shade Variation



## Slip Resistance

DCOF	Values	Applications
<input type="checkbox"/>	0.42	Recommended Standard DCOF value for wet/dry commercial flooring
	0.65	Recommended Standard DCOF value for ADA ramps

ASTM C-1028  
ANSI A137.1  
DIN 51097/51130

DIN 51130 \*R9: Industry Standard/ADA Requirements \*\*R11: Recommended For Exteriors  
 R9\* (3-10°)  R10 (10-19°)  R11\*\* (19-27°)  
 R12 (27-35°)  R13 (>35°)

DIN 51097

Class	Typical Applications	Critical Angle
<input checked="" type="checkbox"/> A	Barefoot, but mainly dry aisles and walkways, dry changing areas	≥12°
<input type="checkbox"/> B	Shower rooms, pool surrounds, wet changing areas, disinfectant spray areas (plus all Class A areas)	≥18°
<input type="checkbox"/> C	Areas constantly under water, e.g. steps into pools, foot baths, included pool surrounds, jacuzzis (plus all Class A&B areas)	≥24°

## Scratch Resistance

MOH'S SCALE  
UNI EN ISO  
10545.6

**6**

MINERAL	
1. Talc (Talc)	6. Microline (Glass, Glazed Tile)
2. Gypsum (Fingernail)	7. Quartz (Unglazed Porcelain)
3. Calcite (Penny)	8. Topaz (Granite)
4. Flourite (Some Marbles)	9. Corundum (Ruby)
5. Apatite (Knife Blade)	10. Diamond (Diamond)

Industry standard ≤175mm<sup>2</sup>

## Wear Resistance

PEI RATING  
UNI EN ISO  
10545.7

- Class 1: Walls only
  - Class 2: Residential floors w/minimal abrasive traffic
  - Class 3: Residential interiors/light commercial traffic
  - Class 4: Medium commercial applications
  - Class 5: All commercial applications/heavy traffic
- \*Wear can vary greatly. please consult with a professional.*

## Stain Resistance

ASTM C1378-04  
UNI EN ISO  
10545.14

**4**

- 5: Removed after 5 minutes (hot water running)
- 4: Removed by manual cleaning (weak detergent)
- 3: Removed by mechanical cleaning (strong detergent)
- 2: Removed by immersion (24 hrs in suitable solvent)
- 1: Stain not removed

## Water Absorption

ASTM C-373  
UNI EN ISO  
10545.3

Water Absorption	Impervious Interior/Exterior Frost Resistant	Vitreous Interior/Exterior Frost Resistant	Semi-Vitreous Indoor Use Only	Non-Vitreous Indoor Use Only
<input checked="" type="checkbox"/> Absorbs 0-.5%	<input type="checkbox"/> Absorbs .5-3%	<input type="checkbox"/> Absorbs 3-7%	<input type="checkbox"/> Absorbs 7% +	

## Breaking Strength

ASTM C648  
UNI EN ISO  
10545.4

**1300**  
n/mm<sup>2</sup>

Industry standard should be greater than  
250 lbs  
or  
50 N/MM<sup>2</sup>

## Facial Dimension

ASTM c499-09  
UNI EN ISO  
10545.02

	Standard	Tolerance	Result
flatness	±5mm	±.5%	PASS
thickness	±6mm	±.5%	PASS
straightness	±4.5mm	±.5%	PASS
squareness	±5.4mm	±.6%	PASS
sides L/W	±1.1mm ±4.5mm	±.5%	PASS

## Chemical Resistance

ASTM C650  
UNI EN ISO  
10545.13

Allowances for:

	result
Acid	PASS
Bases	PASS
Chemicals	PASS

## Leed Information



REQUIREMENTS FOR COMMERCIAL INTERIORS/NEW CONSTRUCTION

Sustainable Sites	1 Point
Site selection	1 Point
SS CREDIT 1 Heat Island Effect-non roof Material with a solar reflectant index of at least 29.	<input type="checkbox"/>
Energy & Atmosphere	1 Point
EA CREDIT 4 Green Power: Products that optimize energy performance for floors and walls using thermal conductivity. BTU-FT	<input type="checkbox"/>
Indoor Environmental Quality Low-Emitting Materials-Flooring Systems	1 Point
IEQ CREDIT 3.1-7 Green Cleaning: Reducing occupants exposure to hazardous cleaning chemicals.	<input type="checkbox"/>
IEQ CREDIT 4.1 Low Emitting Adhesives: Products less than 65 G/L VOC	<input checked="" type="checkbox"/>
IEQ CREDIT 4.3 Low Emitting Materials: Flooring systems.	<input type="checkbox"/>

Materials & Resources	1 Point	2 Points
M&R CREDIT 2 Construction Waste Management: Recycling salvaged construction waste in to new reusable materials.	50% <input checked="" type="checkbox"/>	70% <input type="checkbox"/>
M&R CREDIT 4.1-4.2 Recycled Content: The sum of post consumer plus 1/2 of the pre consumer reps at least 10-20% of total value of materials.	10% <input type="checkbox"/>	20% <input checked="" type="checkbox"/>
M&R CREDIT 5 Regional Materials: Materials manufactured within 500 miles of the project site.	10% <input checked="" type="checkbox"/>	20% <input type="checkbox"/>
Innovation in Design	1-5 Points	
ID CREDIT 1 Innovation in Design Measurable exemplary environmental performance.	<input type="checkbox"/>	

Type: **Porcelain Stoneware**

Product Line: **Venezia (polished)**

*\*The marketing name for this product is property of Canos Tile & Stone. This same product may be marketed under different names.\**